


How to set up Teamspeak 3 on your Android Device



1: Download Teamspeak 3 – Visit the Google Play store for this app (it is a paid for application).

2: Once downloaded, Click teamspeak icon so the application opens up.

This image shows 3 servers already in the system. Obviously yours won't show these yet.

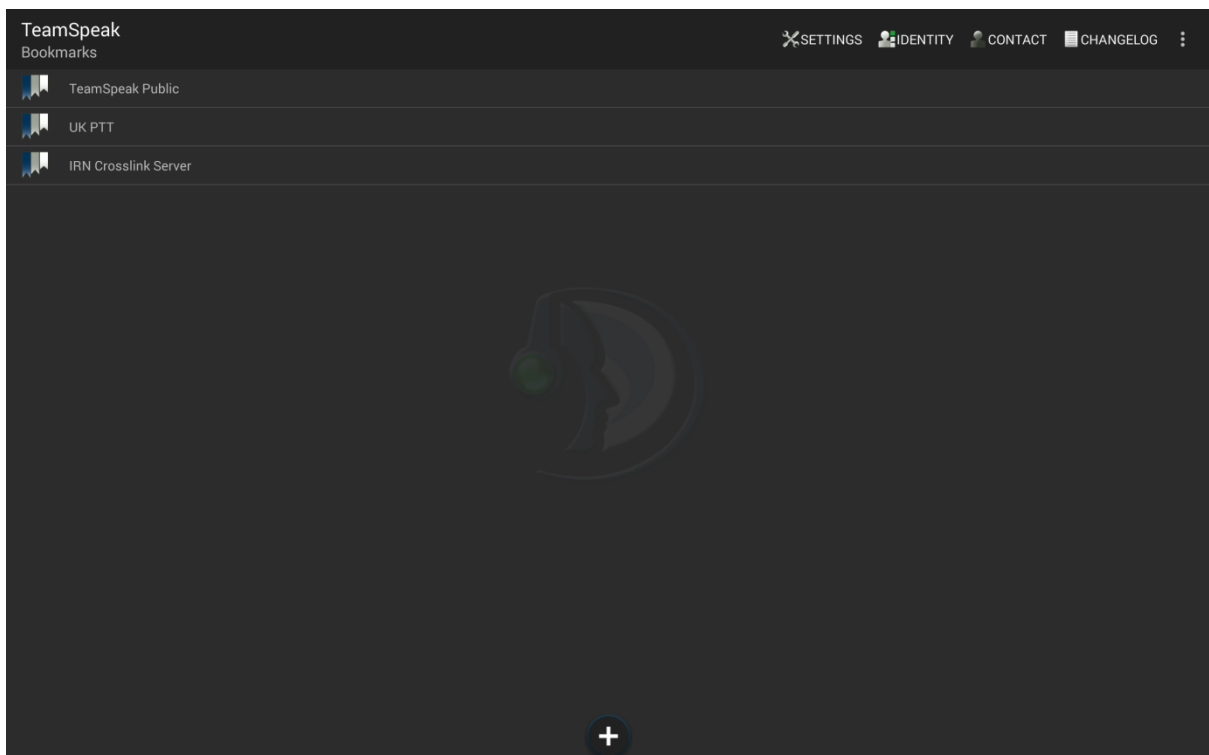

3: Click on the “+” symbol at the bottom.

This will now open up a window allowing you to enter the server details.



The screenshot shows the TeamSpeak Bookmarks dialog box with the following fields and values:

- Label: IRN Crosslink Server
- Address: irn.ts.io
- Server Password: (empty)
- Nickname: AB12 ABS
- Default Channel: (empty)
- Channel Password: (empty)
- Show ServerQuery client:
- Identity: Default
- Location: Local

A SAVE button is located at the bottom of the dialog.

Enter the details as shown above, but replace the “Nickname” with your “Callsign – Name”.

Label: IRN Crosslink Server

Address: irn.ts.io

There is no server password required.

The channel and channel password should be left blank.

Click “Save” when completed.


4: The server details should now display as they are in image 1 on the previous page.

5: Tap on the server showing “IRN Crosslink Server”.

It will now attempt to connect to the server. Once connected it will audibly say “Connected”.

6: Using the Talk Groups.

Once connected, the device will show the following page:

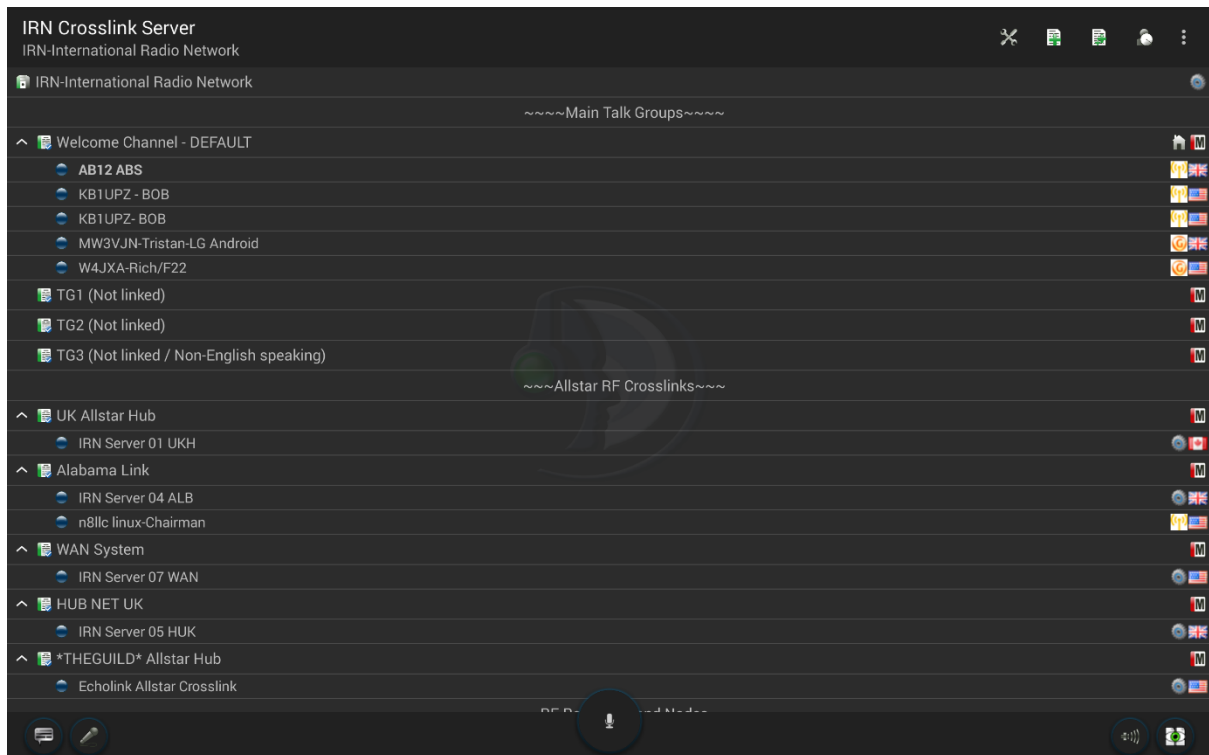

This shows the “Talkgroups” that are in use on this server.

As more talk groups are being added all the time, this list will change slightly.

When you first enter the talk group, it will automatically put you into the “Welcome Channel”.


The Welcome Channel is not linked to anything else and is only hosted on Teamspeak 3. Standard radio etiquette should be maintained in all talk groups at all times (with the exception of the “Testing” talk group).

The Welcome Channel is intended for “calling” and “monitoring” mainly. If you intend on having a QSO, please switch to one of the other Talkgroup Channels (TG1/2/3 etc)

You will be able to see if there are any other users in that group when you join, as their name and call sign will appear above yours.

In order to transmit, just hold down the microphone button (PTT) on the bottom of the screen.


7: You can move groups by pressing and holding the chosen talk group. It will then bring up the following options:

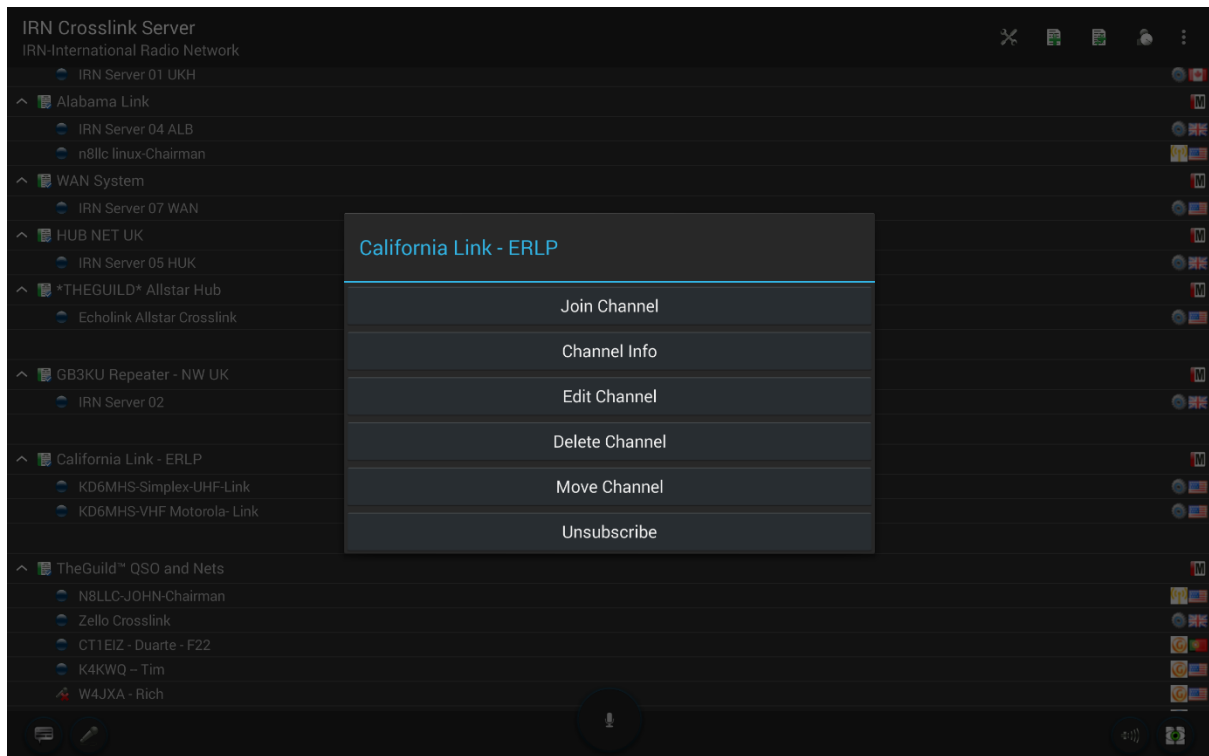

Select “Join Channel” by pressing it. You will then move into that Talkgroup.

8: Clicking on “settings” in the top right side, will bring up this menu. Please ensure the following boxes are ticked.

Failure to click the “Handsfree” box will result in very quiet audio.

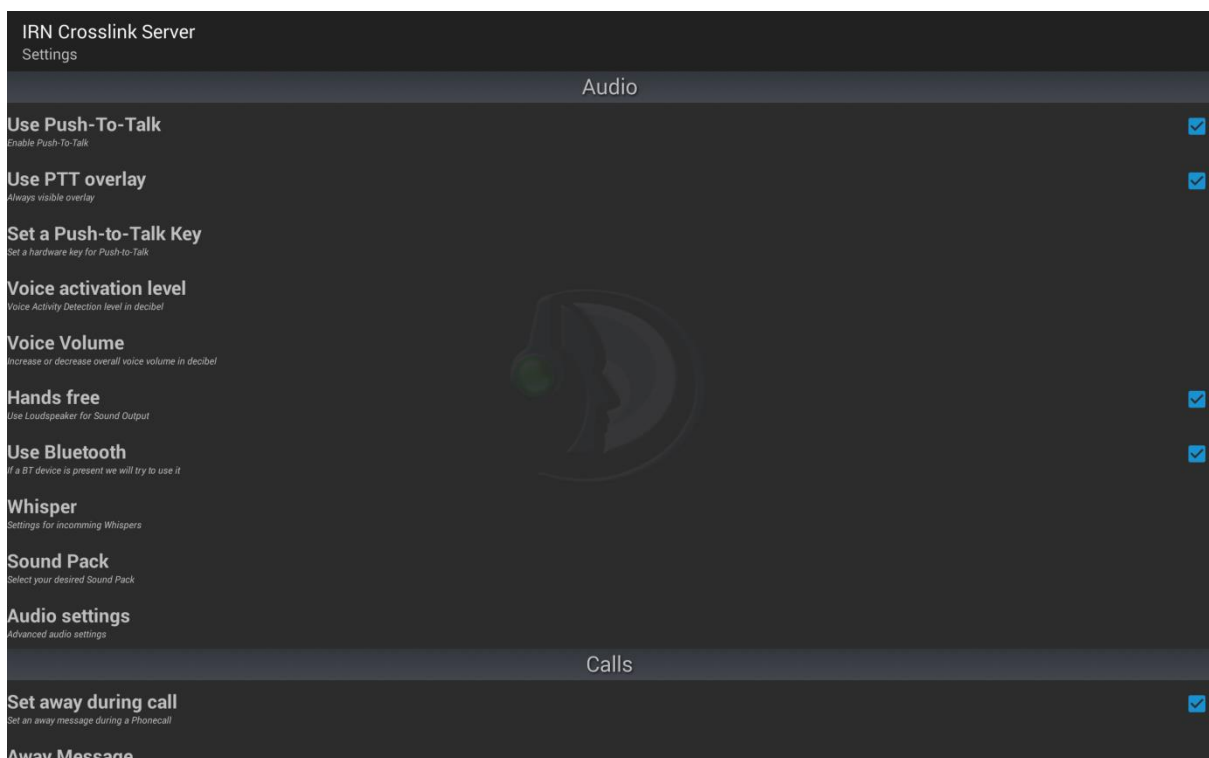

9: Other settings:

Please ensure "Use PTT" is selected.

Bluetooth headsets are supported by this app.

You can also choose to customise your own PTT button.



PLEASE NOTE, THE ABILITY TO TRANSMIT ON ANY TALK GROUP WILL ONLY BE GIVEN ONCE YOUR LICENCE HAS BEEN VERIFIED BY A MODERATOR. YOU MAY RECEIVE ONLY UNTIL VOICE RIGHTS ARE GIVEN.

PLEASE ENSURE THAT YOU ARE NOT ON VOX MODE (Some devices default to this for some reason. You can change it to PTT mode in the settings)

When you first join, you will be only able to transmit in the Welcome Channel, TG1, TG2 and TG3. At some point, one of the Sysops will "tag" you, and a **V** symbol will appear next to your name. This means that we are now attempting to confirm that you are a licensed ham and who you say you are. You are free to move about the different Talkgroups, but your ability to TX is currently restricted.

Sadly we have had some users try and create bogus callsigns and/or use someone else's. With certain Talkgroups being RF linked, it is important that we take reasonable steps to ensure that TX abilities are only given to licensed users. We hope you understand why this precaution is in place.

If after 24 hours, you haven't heard from us and your icon is still a **V**, please drop us a message either on our Facebook page or on the website's contact us page.

If you sign in and your icon has changed to a **A** (with a small **(*)**) ( or a  if you are a Guild member), that means you have been verified and are now free to TX and RX within the system.

If your symbol changes to a , this means that we have an issue in trying to verify who you are. Please drop us a message via Facebook or the website below.

www.internationalradionetwork.net

Please feel free to drop us a line with any questions or queries you may have at any time.